

### LINERS PROTECTION FELT

**ANTI-MICROBIAL FELT:** anti-bacterial (no pink stain according to ASTM E 1428), anti-fungal (according to EN ISO 846 Section A), anti-algae (according to SAN BIO 33/99).

**Efficient PROTECTIVE BARRIER (walls and bottom) between the foundations and Liner:**


- SOFTENS IMPACTS in the event of contact with the liner
- PROTECTS AGAINST PERFORATION: the fibres thickness and density protect from any sharp element
- HIDES ANY IMPERFECTIONS of CONCRETE WALLS

**EASY INSTALLATION:** easy to cut / Light grey color avoiding the reverberation of light

**ENVIRONMENTALLY FRIENDLY:**

- Made with fusionbonding fibres (required low energy)
- Contains no chemicals or latex

**INERT MATERIAL / ROT-PROOF**

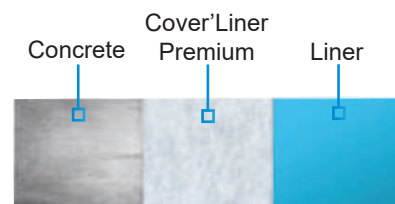

Slightly fibrous surface in contact with concrete



1985 Pale Grey

Smooths surface in contact with liner



PROTECTION AGAINST



SOFT TOUCH




EASY TO CUT



ECO-DESIGN:  
LOW ENERGY  
PROCESS



100%  
RECYCLABLE FELT

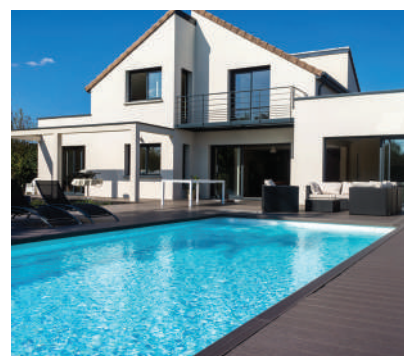

#### TECHNICAL DATA

**Surface:** needlepunched felt containing a biocidal product with the active substance: Thiabendazole / N-Butyl-benzisothiazolinone  
**Fibres:** 100 % polyolefin  
**Total weight:** 350 g/m<sup>2</sup> ± 10%  
**Average thickness:** 2,7 mm ± 10%

#### INSTALLATION

Clean the concrete to remove all the dust  
 Smooth surface towards liner  
 Slightly fibrous surface: concrete or wood side  
 Fix it with double sided tape or a waterproof spray glue

#### REFERENCES

Dimensions	Ø rool	Ø tube	Sommer codes
2 x 30 m	35 cm	100 mm	PMMTF1985C2