



**SAVE
UP TO
ON INSTALLATION TIME**

30%

PROTECTION FELT FOR LINERS

COVER' LINER


Classic



Slightly fibrous surface in contact with concrete, wood or metal.

Colour: 1985 Pale Grey

Smooth surface in contact with liner

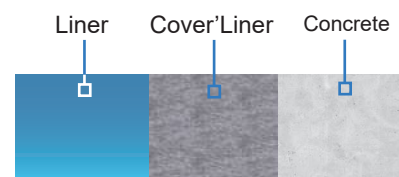

EFFICIENT PROTECTIVE BARRIER (walls and bottom) between foundations and liner

- Shock absorption
- Protects against perforation: thickness and density fibres protect from any sharp elements
- Hides any imperfections of concrete walls



ENVIRONMENTALLY FRIENDLY

- Manufactured with thermofusion fibres (low energy consumption)
- No chemicals binders or latex
- Eco-designed and recyclable felt



INERT MATERIAL / ROT-PROOF

EASY INSTALLATION

- Very easy to cut
- Light flecked grey colour avoiding light reflection
- Edge-to-edge installation



TECHNICAL DATA

Surface: needlepunched homogeneous felt

Fibres: 100 % polyolefin, naturally resistant to wet environments

Backing: thermofusion fibres

Thickness: 2,7 ± 0,3 mm

2 versions:

Classic 350 : 350 g/m² ± 10%

Classic 450 : 450 g/m² ± 10%

Ø roll: 35 cm

Ø tube: 100 mm

INSTALLATION

Clean the concrete to remove all the dust

Smooth surface: towards liner

Slightly fibrous surface: concrete, wood or metal side

Glue with a spray glue.

	Classic 350	Classic 450
1,5 x 30 m	POPTF1985G150	PSMTF1985G150
2 x 30 m	POPTF1985C2	PSMTF1985C2

Sold in europalette of 8 rolls vertically stored



A Sommer Needlepunch brand

Sommer Needlepunch
341, rue de la Mairie
59780 Baisieux - France

Contact:
coverliner@sommernp.com
www.sommernp.com

Linerclassic 2025-A2-0725 / Photo credit : Sommer.
We reserve the right to alter technical specifications without prior notice.

