

COVER' LINER

SPECIAL **Renov**

PROTECTION
AGAINST DAMAGE



SOFT
TOUCH



EASY
TO CUT



ECO-DESIGN:
LOW ENERGY
PROCESS




100% RECYCLABLE
FELT

Slightly fibrous
surface in contact
with concrete

Colour : 1975 Pale Grey

Smooth surface
in contact with liner

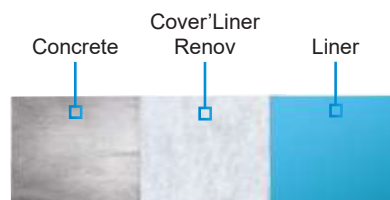

VERY THICK PROTECTIVE BARRIER between the foundations and the liner:

- SHOCK ABSORBING
- PROTECTS AGAINST PERFORATION: thickness and density fibres protect from any sharp element
- HIDES ANY IMPERFECTIONS of CONCRETE WALLS

EASY INSTALLATION: easy to cut / addition of water resistant binder to provide rigidity and flexibility to the product.

Light Grey flecked colour avoiding light reflection

SIGNIFICANT TIME SAVING (around 30%): simply unroll the felt, no joints to make

CONSTRUCTION AESTHETICS: BEAUTIFUL SEAMLESS FELT visually more aesthetic than welded foam tiles.

The client has the impression of a clean, well-renovated site.

RESPECT THE ENVIRONMENT: designed with energy-efficient fusion fibers

INERT MATERIAL / ROT-PROOF



TECHNICAL DATA

Surface: homogeneous needlepunched felt

Fibres: 100 % polyolefin

Total weight: 750 g/m² ± 10%

Average thickness: 4,10 mm ± 10%



INSTALLATION

Clean the concrete to remove all the dust

Smooth surface: towards liner

Slightly fibrous surface: concrete or wood side

Fix it with double sided tape or a waterproof spray glue

TIP: cut the strips of Cover' Liner Renov beforehand instead of moving down the full roll into the pool.

REFERENCES

Dimensions	1,5 x 30 m	2 x 30 m
Sommer codes	STRIW1975G150	STRIW1975C2

*Sold in europalette of 6 rolls
vertically stored*



A Sommer Needlepunch brand

Sommer Needlepunch
341, rue de la Mairie
59780 Baisieux - France
www.sommernp.com

Tel : +33 (0)3 20 64 46 46
Fax : +33 (0)3 20 64 46 24
E-mail : commandes@sommernp.com

